

Order No.

V17 - P C
 ① ② ③

① Pressure range

- **V17** - Negative pressure (-101.3 ~ 0 kPa)

② Output type

- No mark - NPN Open Collector
- **P** - PNP Open Collector




③ Analog output & Cable specification



- **C** - No analog supply, M8, 4-Pin male connector
- G** - No analog supply, Grommet type 4-Core 2m lead wire
- GA** - Analog supply, Grommet type 5-Core 2m lead wire



VCM8 4 2 (Female Connector)

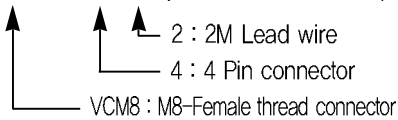

- (1) Brown(+)
- (2) White (OUT2)
- (3) Blue (-)
- (4) Black (OUT1)

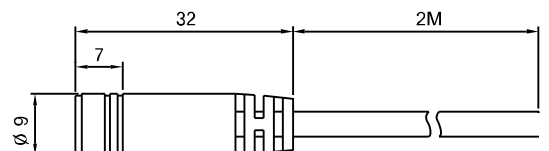


specifications

Specifications	Model	V17 - ② G	V17 - ② C	V17 - ② GA
Applicable fluid		Air, Non corrosive gases, Incombustible gases		
Pressure range		-101.3 ~ 0 kPa		
Withstand pressure		kPa:0.1, MPa:-, kgf/cm ² :0.001, bar:0.001, psi:0.01, InHg:0.1, mmHg:1, mmH ₂ O:0.1		
Pressure port		M5 Female(Nylon material)		
Power supply voltage		12~24 VDC ±10%, Ripple (P-P) 10% or less		
Power consumption		≤ 55 m A		
Output		NPN : open collector 2 output Max. load currunt : 80mA Max. supply volatage : 30VDC Residual voltage : ≤1V(load currunt 80mA)	PNP : open collector 2 output Max. load currunt : 80mA Max. supply volatage : 24VDC Residual voltage : ≤1V(load currunt 80mA)	
Analog output		-		Output voltage: 1~5V ≤ ±2.5%F.S. (Within rated pressure range) Linearity: ≤ ± 1% F.S.
Environment	Repeatability (switch output)	≤±0.2% F.S. ±1digit		
	Response time	≤25ms (chattering-proof function: 24ms, 192 and 768ms selections)		
	Protection structure	IP40		
	Operating ambient temp. (°C)	Operation : 0°C ~ 50°C, Storage : -20°C ~ 60°C (No condensation or freezing)		
	Operating humidity	Operation / Storage : 35~85% RH (No condensation)		
	Vibration resistance	Total amplitude 1.5mm, 10Hz~55Hz~10Hz scan for 1minute, two hours each direction of X, Y and Z		
	Shock resistance	980 m/s ² (100G), 3 times each in direction of X, Y and Z		
Temperature characteristic		≤±2% F.S. of detected pressure (25°C) at temp. Range		
Hysteresis mode		Adjustable		
Window comparator mode		Fixed (3digit)		
Indicator accuracy		≤±2% F.S. ±1 digit (ambient temp.:25±3°C)		
Cable		Oil-resistance cable (0.15mm ²)		
Weight (g)		75	35	75

Operating mode


Hysteresis mode :

Output hysteresis value can be pre-setted.

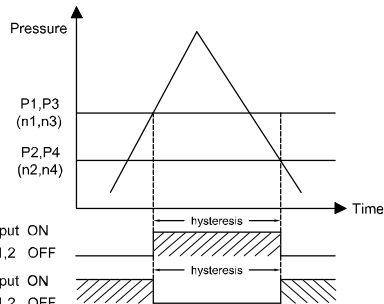


Window comparator mode :

Within pressure setting range, Pressure transfer output can be ON or OFF.

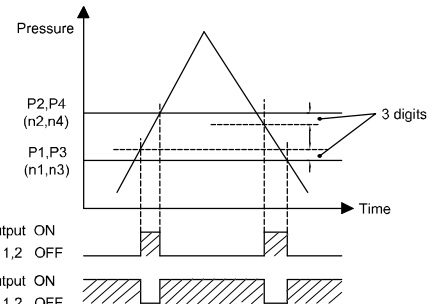


Circuit diagram


V17-C, V17-G NPN output

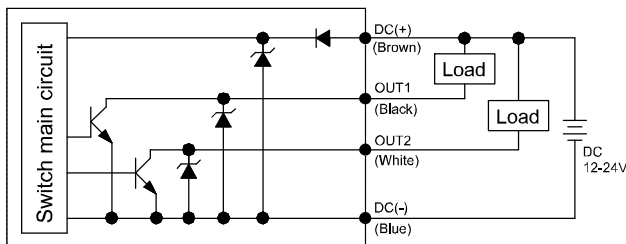


V17-GA NPN output

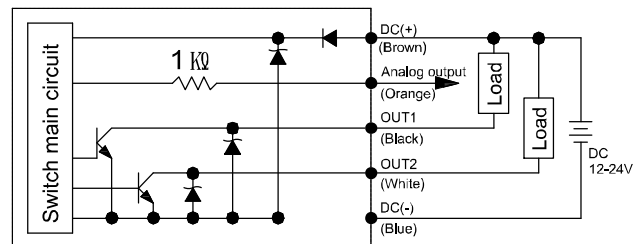

V17 PG PNP output

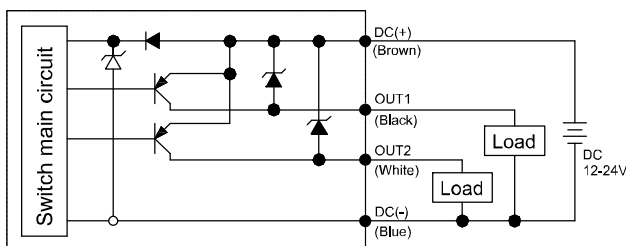

V17-PGA PNP output

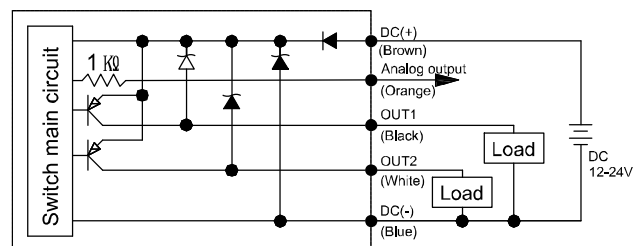

Dimension

