


Accessories

■ Bag filter

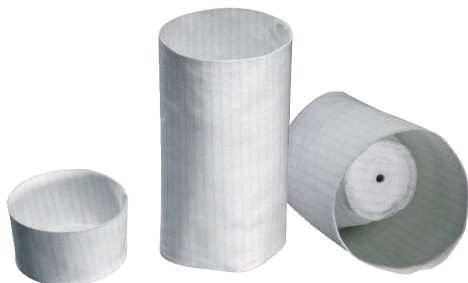

- Material : TFE coated antistatic needle felt of polyester / carbon fibers
- Washable 2 to 4 times in 40°C
- Food quality
- Working temp. : +80°C

■ Vacuum filter



- Pressure range : Vacuum only
- Working temp. : +100°C
- Material : PA66, PC, PE (Filter), NBR

■ Control Unit



Electrical (..EC..)

- Running time adjustable
- Discharge time adjustable
- Auto / Manual mode
- Level control
- Voltage : 110V~220V or 220V
- Material : PC, ABS, AL, BS
- Working temp.: 0°C ~ +80°C

Pneumatic (..AC..)

- Running time adjustable (0.1~30s)
- Discharge time adjustable (0.1~30s)
- Delay period adjustable (0.1~30s)
- Level control available (option)
- Feed Pressure : 6bar (87psi)
- Material : PC, ABS, AL, BS,NBR
- Working temp. : -15°C ~ +60°C

Pneumatic (..AC2..)

- Running time adjustable (0.1~30s)
- Discharge time adjustable (0.1~30s)
- Feed Pressure : 6bar (87psi)
- Material : PC, AL, BS..
- Working temp. : -15°C ~ +60°C


■ Vacuum Pump



- Supply air pressure : 4 ~ 6 bar (58 ~ 87 psi)
- Vacuum level : Max.- 92kPa (- 27.17 inHg)
- Air consumption : 300 ~ 4,920 NI/m (10.59 ~ 173.74 scfm)
- Vacuum flow : 1,100 ~ 14,460 NI/m (38.84 ~ 510.64 scfm)
- Noise level : 55 ~ 76 dBA
- Working temp. : - 20°C ~ + 80°C

Accessories

Sealing Gasket

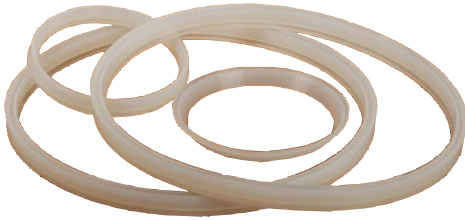

- Material : Silicon
- Working temp. : -40°C ~ +200°C

	Ordering Code	
	VTEC 100-400L	VTEC 600-1200L
	1600 23	1600 66
	1600 62	1600 67
	1600 21*	1600 64*

※ Remark : The ordering code for 1 Qt'Y.
 * : Applicable to type 'B' or 'BA'. ex) VTEC 200 - □ C - B

Pipe Fitting



- Material : Silicon, SUS304
- Working temp. : -40°C ~ +200°C


	Model	Ø [inch]			mm [inch]
		D	d	D2	L
	CF 5151	51 [2.007]	-	79 [3.11]	110 [4.33]
	CF 3232	32 [1.259]	-	50 [1.968]	82 [3.228]
	CF 1076	101.7 [4]	76.1 [3]	138 [5.433]	150 [5.9]
	CF 7651	76.1 [3]	51 [2.007]	112.5 [4.43]	130 [5.12]
	CF 5140	51 [2.007]	40 [1.574]	79 [3.11]	110 [4.33]
	CF 4032	40 [1.574]	32 [1.259]	64 [2.519]	98 [3.858]
	CF 3222	32 [1.259]	22 [0.866]	50 [1.968]	82 [3.228]
	CF 513Y	51 [2.007]	-	-	181 [7.125]
	CF 323Y	32 [1.259]	-	-	133 [5.236]

Feed Nozzle



- Adjustable clearance of suction point.
- Material : SUS304, MC Nylon, Al

Model	Ø [inch]			mm [inch]	
	D1	D2	D3	L1	L2
VCFN 32	32 [1.259]	32 [1.259]	51 [2.007]	940-1,005 [37-39.56]	852 [33.543]
VCFN 40	42.8 [1.685]	42.8 [1.685]	63.5 [2.5]	965-1,035 [37.99-40.74]	855 [33.661]
VCFN 50	51 [2.007]	42.8 [1.685]	63.5 [2.5]	965-1,035 [37.99-40.74]	855 [33.661]
VCFN 100	101.6 [4]	76.3 [3.003]	101.6 [4]	1,575-1,665 [62-65.55]	1,290 [50.787]

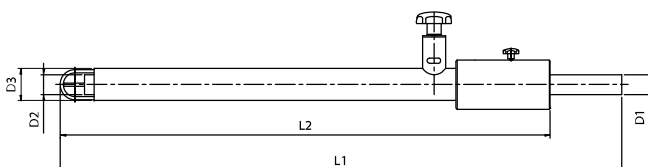

Specifications subject to change without notice.